


The image contains two technical drawings of sanitary registers, labeled 'PLANTA' and 'CORTE A - A'.

PLANTA (Top View): Shows a square register with a side length of 64 cm. The central opening is 40 cm wide and 84 cm high. The opening is lined with 'MEDIA CAÑA' (hatched pattern). A 'TUBERIA DE PVC 6" Ø PEND. 5 AL MILLAR' is shown entering from the right. The drawing is labeled 'REGISTRO PLUVIAL (R.A.P.)' with a scale of 'acotación: cms sin escala'.

CORTE A - A' (Cross-section): Shows the vertical profile of the register. The total height is 64 cm. The top has a 'REJILLA PARA AGUAS PLUVIALES' (grate) supported by a 'MARCO DE CONCRETO ARMADO' (reinforced concrete frame). The main body is a 'MURO A BASE DE TABIQUE 10X14228 DE LA REGION JUNTEADO CON MORTERO CEM-ARENA PROP. 1:3' (brickwork wall with mortar). The bottom is a 'PLANTILLA DE CONCRETO F'C=100 KG/CM2' (concrete slab). A 'TUBERIA DE PVC 4" Ø PEND. 5 AL MILLAR' is shown entering from the right. The drawing is labeled 'REGISTRO PLUVIAL (R.A.P.)' with a scale of 'acotación: cms sin escala'.

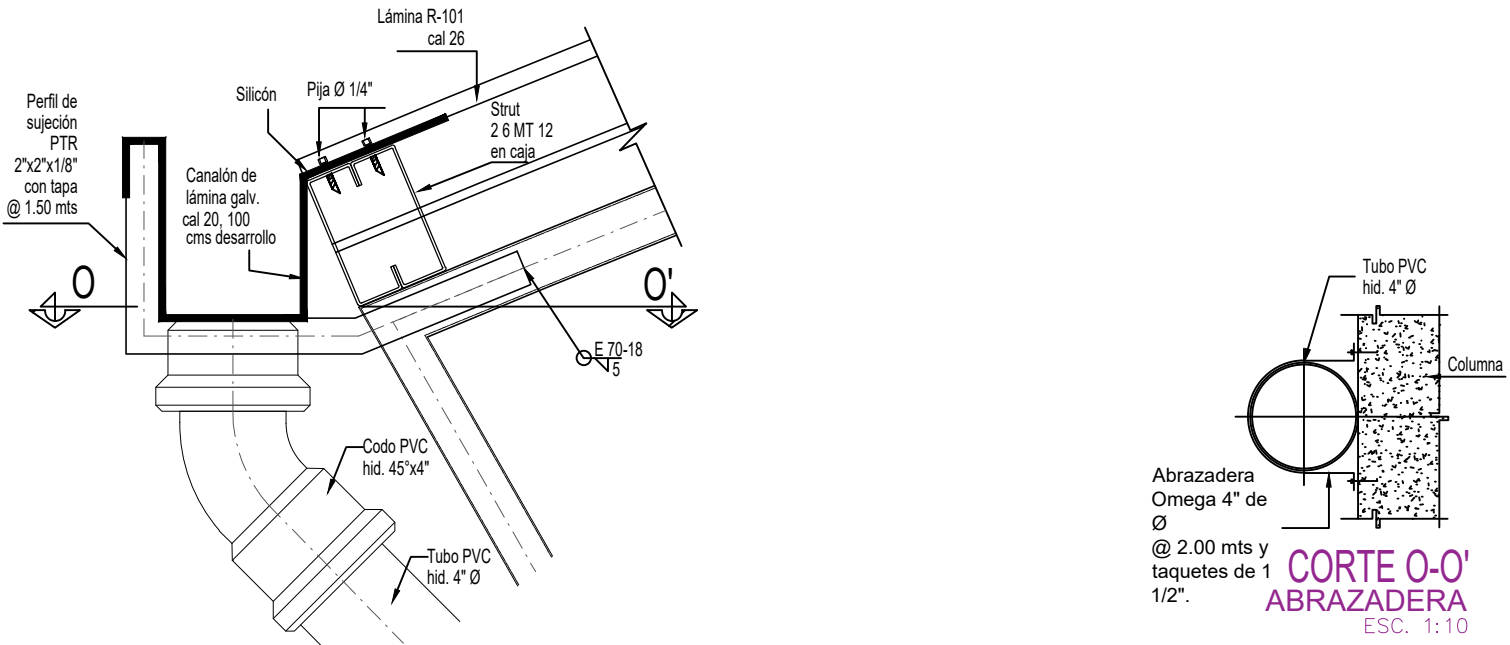

CORTE 0-01
ABRAZADERA
ESC. 1:10

DETALLES DE REGISTROS SANITARIOS

-

